


PRODUCT SPECIFICATION


cosmo ELECTRONICS CORPORATION	Reed Relay : D1B120000	NO. 50R01008 SHEET 1 OF 2	REV. 4

1. OUTSIDE DIMENSION : UNIT (mm)

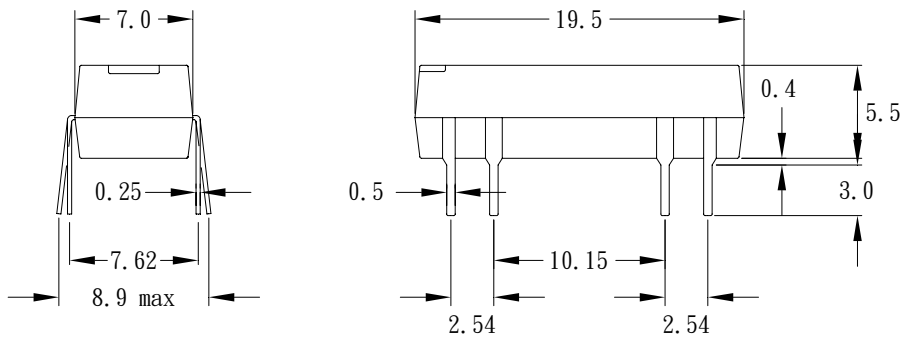

TOLERANCE : (1) 0. XX +/-0.1mm (2) X. XX +/-0.5mm (3) XX. XX +/-1.0mm

2. SCHEMATIC : TOP VIEW

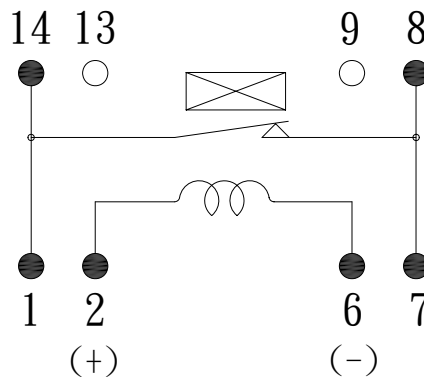

PRODUCT SPECIFICATION

cosmo ELECTRONICS CORPORATION	Reed Relay :	NO. 50R01008	REV.
	D1B120000	SHEET 2 OF 2	4

3.0 COIL RATINGS : (AT 20°C)

3.1	Coil resistance	1000	Ω	(±10%)
3.2	Nominal coil voltage	12	VDC	
3.3	Maximum Continuous voltage	15	VDC	
3.4	Must operate	9	VDC	
3.5	Must release	1.2	VDC	
3.6	Rated current	12	mA	

4.0 ELECTRONICAL CHARACTERISTICS :

4.1	Contact resistance	100	mΩ	(max)
4.2	Operate time	0.5	ms	(max)
4.3	Bounce time	0.5	ms	(max)
4.4	Release time	0.2	ms	(max)
4.5	Insulation resistance	(100 VDC open contact)	10 ¹¹	Ω (min)
4.6	Power	10	VA	(max)
4.7	Switching voltage	200	VDC	(max)
4.8	Switching current	0.5	A	(max)
4.9	Carry current	1.0	A	(max)
4.10	Breakdown voltage	(across open contact)	250	VDC (min)
		(between coil & contact)	500	VDC (min)
4.11	Life expectancy	(signal level)	10 ⁸	
4.12	Operating temp		-40 to 85°C	
4.13	Storage temp		-50 to 125°C	
4.14	Resonant frequency		3.5	KHZ
4.15	Vibration (10-2000HZ)		20	g (max)
4.16	Minimum permissible load		100	mVDC 10uA