

● Description

The KAQV258 series is robust, ideal for telecom and ground fault applications. It is a SPST normally open switch (1 Form A) that replaces electromechanical relays in many applications. It is constructed using a GaAlAs LED for actuation control and an integrated monolithic die for the switch output. The die, fabricated in a high-voltage dielectrically isolated technology, is comprised of a photodiode array, switch control circuitry and MOSFET switches.


● Features

1. Load voltage: 1,500 V
2. Load current: 50 mA
3. Distance between output terminals are longer than 6-pin DIP package

● Application

- Isolation detection
- Voltage monitoring
- Signal control


● Schematic

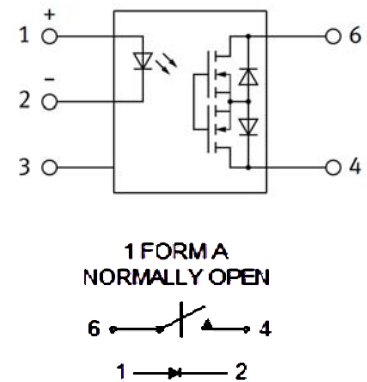


● Outside Dimension

Unit : mm

Dual in line type

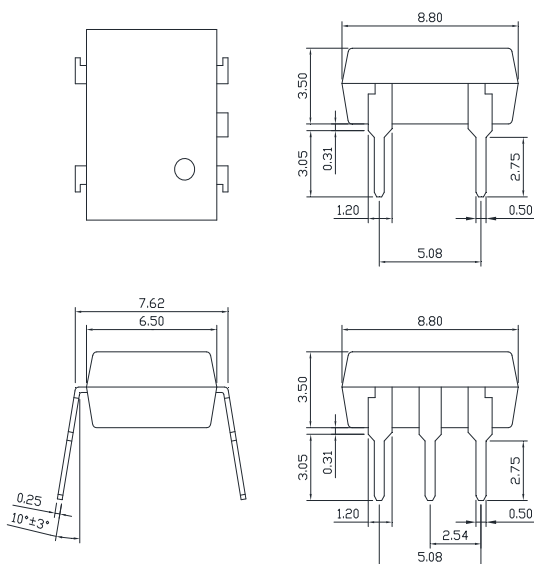

Surface mount type

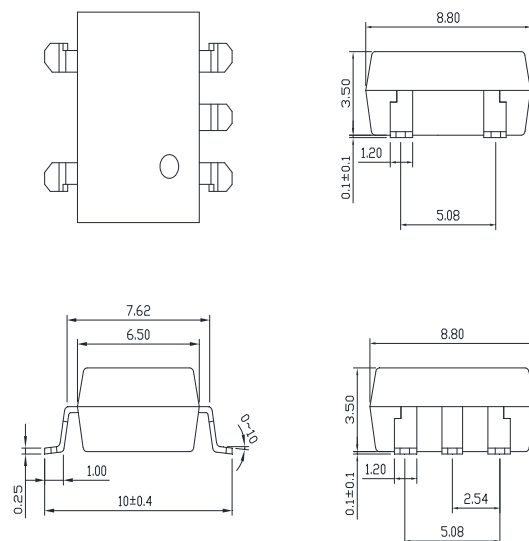

TOLERANCE : $\pm 0.2\text{mm}$

● Device Marking



Notes :

cosmo

V258 : Part NO.

YWW Y : Year code / W : Week code

● Absolute Maximum Ratings

(Ta=25°C)


Parameter		Symbol	Ring	Unit
Input	Continuous forward current	I_F	50	mA
	Peak forward current	I_{FP}	1	A
	Reverse voltage	V_R	5	V
	Power dissipation	P_{in}	75	mW
Output	Load voltage	V_L	1500	V
	Continuous load current	I_L	0.05	A
	Peak load current	I_{peak}	0.18	A
	Power dissipation	P_{out}	500	mW
Isolation voltage		V_{iso}	5000	Vrms
Total power dissipation		P_t	500	mW
Derate linearly from 25°C		-	2.5	mW/°C
Operating temperature		T_{opr}	-40 to +100	°C
Storage temperature		T_{stg}	-40 to +125	°C
Junction temperature		T_j	125	°C
Soldering temperature 10 seconds		T_{sot}	260	°C

● Electro-optical Characteristics



(Ta=25°C)

Parameter		Symbol	Conditions	Min.	Typ.	Max.	Unit
Input	Forward voltage	V_F	$I_F = 10 \text{ mA}$	-	1.2	1.5	V
	Operation input current	I_{FON}	$I_L = \text{Max.}$	-	0.8	3.0	mA
	Recovery input current	I_{FOFF}	$I_L = \text{Max.}$	0.2	-	-	mA
Output	On resistance	R_{on}	$I_F = 10 \text{ mA}$ $I_L = \text{Max.}$ Within 1 s	-	150	300	Ω
	Off-state leakage current	I_{LEAK}	$I_F = 0 \text{ mA}$ $V_L = \text{Max.}$	-	-	1	μA
I/O capacitance		C_{iso}	$f = 1 \text{ MHz}$ $V_B = 0 \text{ V}$	-	1.3	3	pF
Initial I/O isolation resistance		R_{iso}	500 V DC	1,000	-	-	M Ω
Turn-on time		T_{ON}	$I_F = 10 \text{ mA}$	-	0.15	1.0	ms
Turn-off time		T_{OFF}	$I_L = \text{Max.}$	-	0.07	0.2	ms



● Turn-on / Turn-off Time

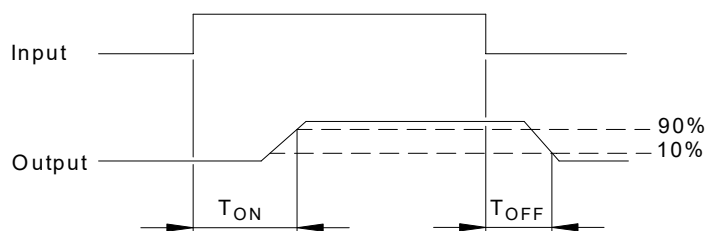

● Schematic and Wiring Diagrams

Schematic	Output Configuration	Load	Connection	Wiring Diagrams
	1a	AC DC	-	

● Using Methods

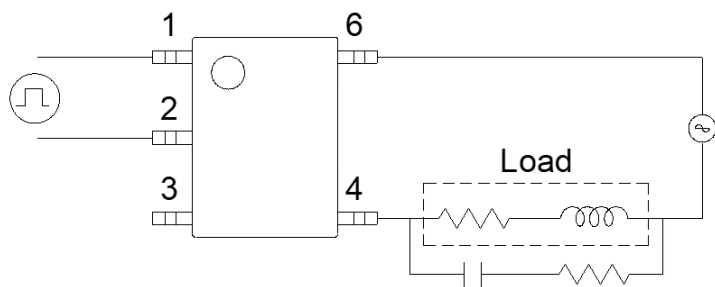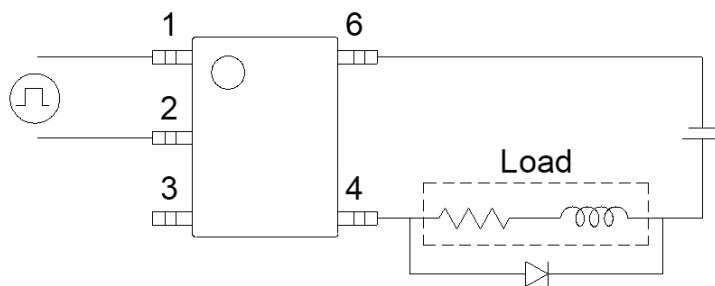

R-C Snubber

Fig. 1. Load current vs Ambient Temperature

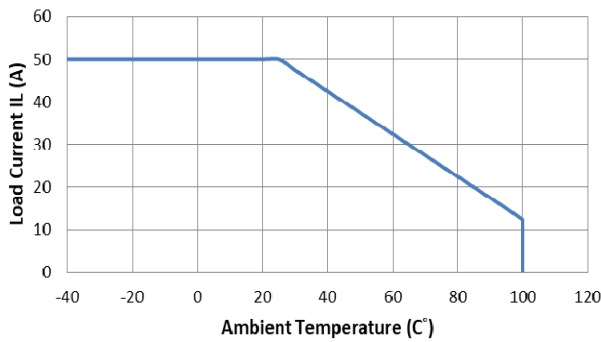


Fig. 2 On Resistance V.S. Ambient temperature

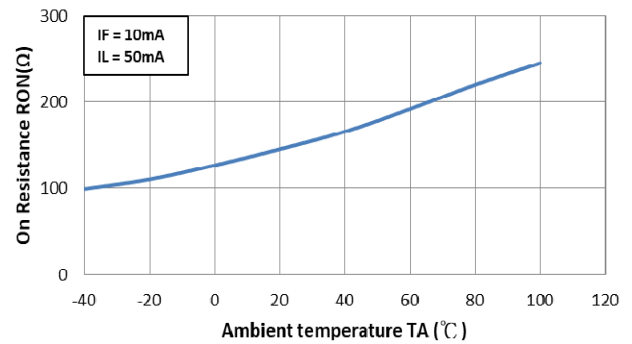


Fig. 3 Turn On Time V.S. Ambient temperature

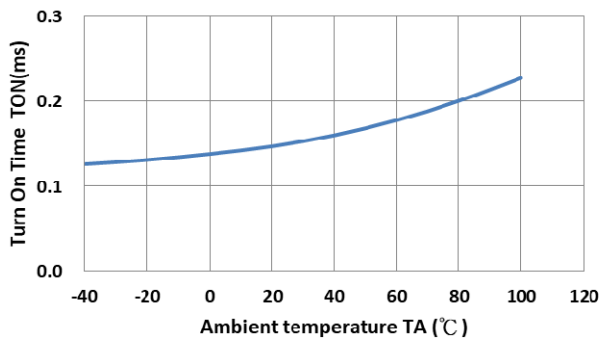


Fig. 4 Turn Off Time V.S. Ambient temperature

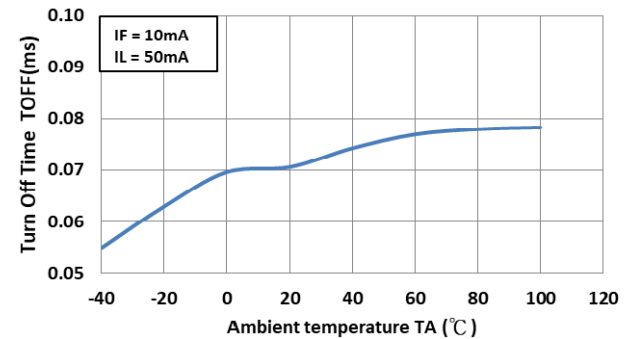


Fig. 5 Operate Input Current V.S. Ambient temperature

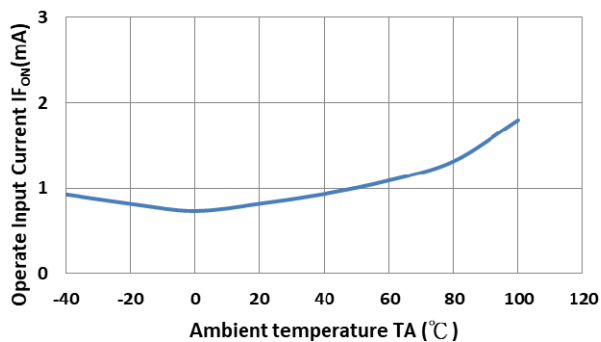


Fig. 6 Revover Input Current V.S. Ambient temperature

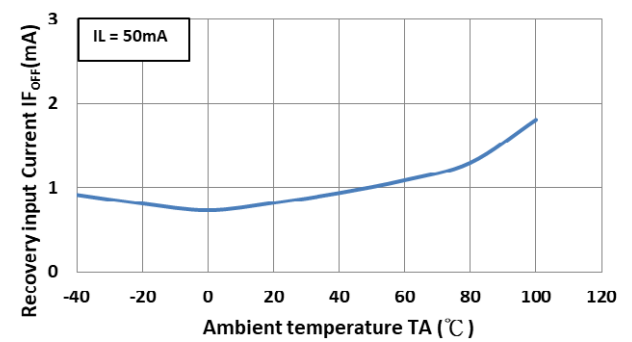


Fig. 7. Forward voltage vs Ambient temperature

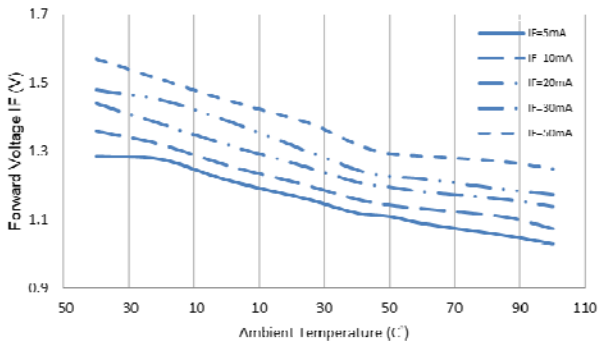


Fig. 8 Load Current V.S. Load Voltage

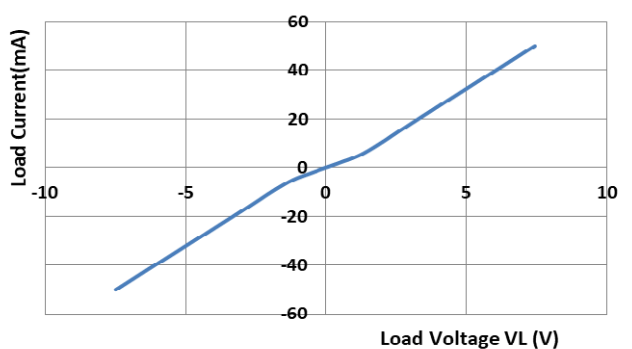


Fig. 9 Off State Leakage Current V.S. Load Voltage

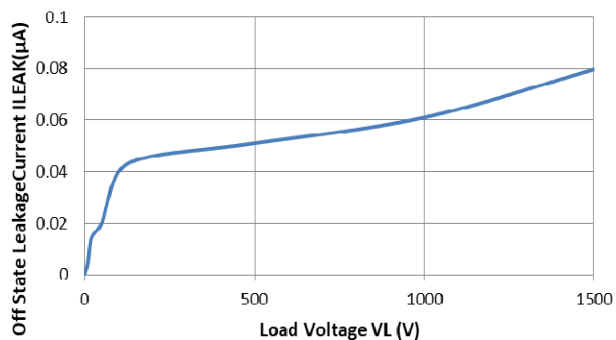


Fig. 10 Turn On Time V.S. Forward Current


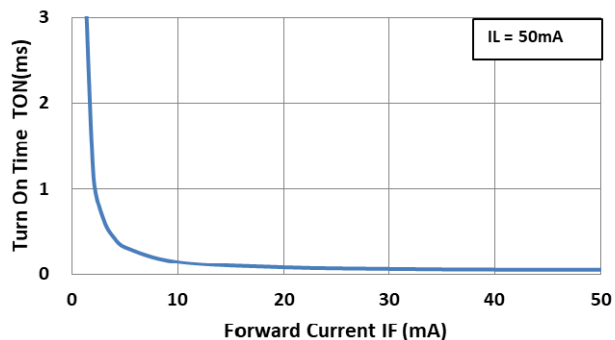


Fig. 11 Turn Off Time V.S. Forward Current

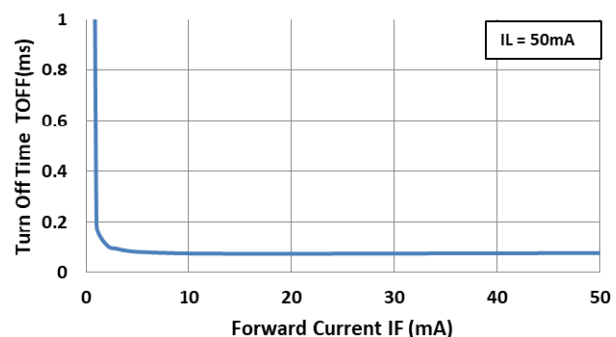


● Recommended Soldering Conditions

(a) Infrared reflow soldering :

- Peak reflow soldering : 260°C or below (package surface temperature)
- Time of peak reflow temperature: 10 sec
- Time of temperature higher than 230°C : 30-60 sec
- Time to preheat temperature from 180~190°C : 60-120 sec
- Number of reflows : Rosin flux containing small amount of chlorine (The flux with a maximum chlorine content of 0.2 Wt% is recommended.)
- Flux : Rosin flux containing small amount of chlorine (The flux with a maximum chlorine content of 0.2 Wt% is recommended.)

Recommended Temperature Profile of Infrared Reflow

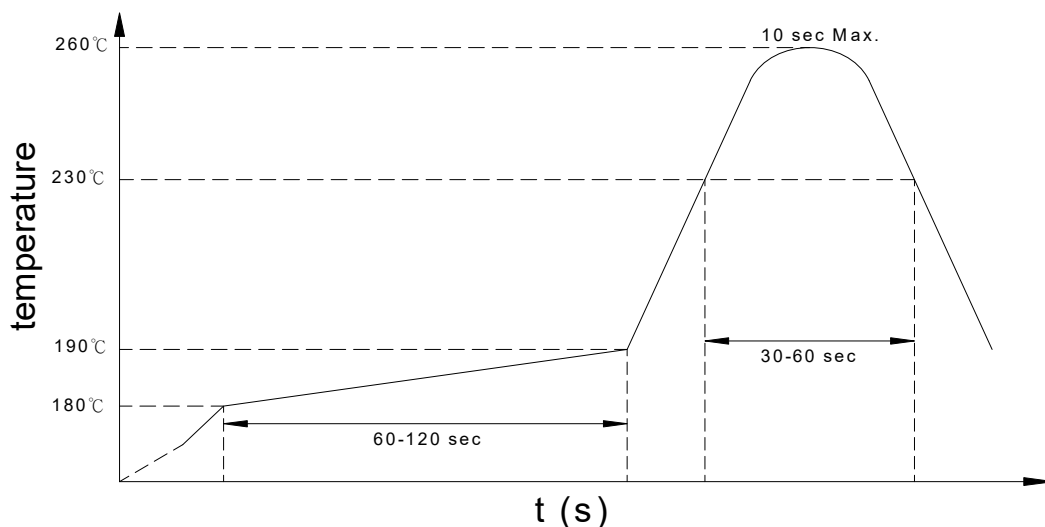

(b) Wave soldering :

- Temperature : 260°C or below (molten solder temperature)
- Time : 10 seconds or less
- Preheating conditions: 120°C or below (package surface temperature)
- Number of times : One
- Flux : Rosin flux containing small amount of chlorine (The flux with a maximum chlorine content of 0.2 Wt% is recommended.)

(c) Cautions :

- Fluxes : Avoid removing the residual flux with freon-based and chlorine-based cleaning solvent.
- Avoid shorting between portion of frame and leads.

● Numbering System

KAQV258 X (Y)

Notes:

KAQV258 = Part No.


X = Lead form option (blank or A)

Y = Tape and reel option (TL 、 TR)

Option	Description	Packing quantity
A (TL)	surface mount type packag + TL tape & reel option	1000 uni s per re l
A (TR)	surfa e mount type package TR tape & reel option	1000 units pe reel


● Recommended Pad Layout for Surface Mount Lead Form

1. Surface mount type.



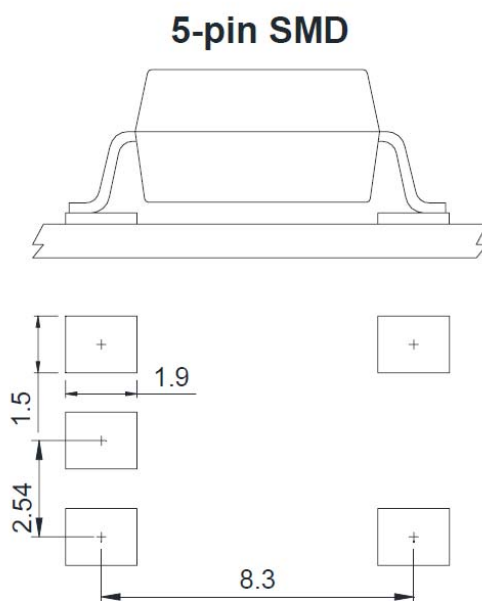


Unit : mm

● 6-pin SMD Carrier Tape & Reel

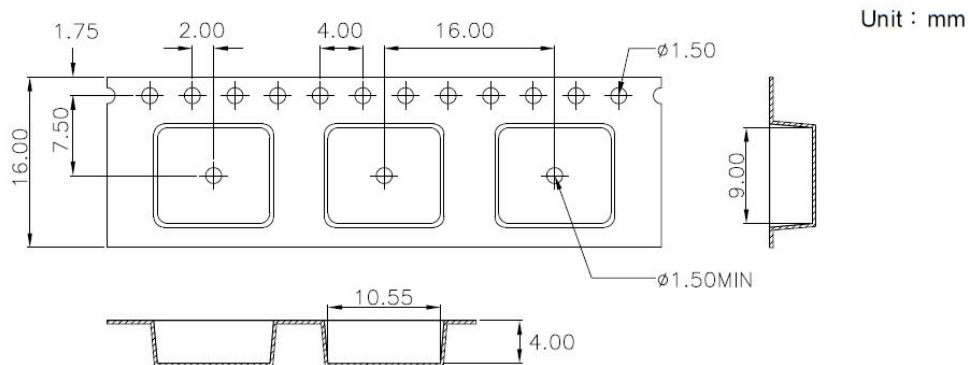

TOLERANCE : ±0.2mm

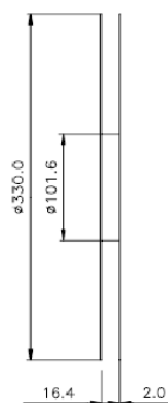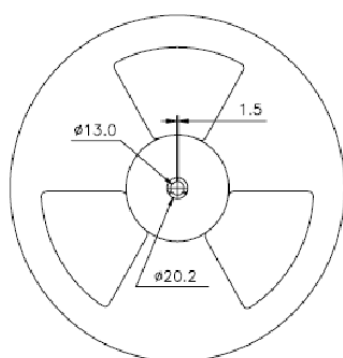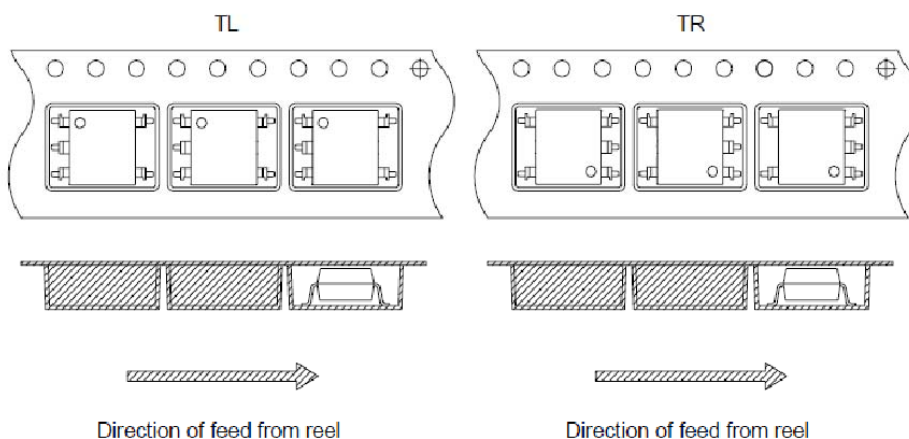

● Application Notice

The statements regarding the suitability of products for certain types of applications are based on cosmo's knowledge of general applications of cosmo products. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to verify the specifications are suitable for use in a particular application. Customers are solely responsible for all aspects of their own product design or applications. The parameters provided in the datasheet may vary in different applications and performance may vary over time. All operating parameters (including typical parameters) must be validated by customer's technical experts for different applications. cosmo assumes no liability for customer's product design or applications. Product specifications do not expand or otherwise change cosmo's terms and conditions of purchase, including but not limited to the warranty expressed therein.

When using cosmo products, please comply with safety standards and instructions. cosmo has no liability and responsibility to the damage caused by improper use of the instructions specified in the specifications.

cosmo products are designed for use in general electronic equipment such as telecommunications, office automation equipments, personal computers, test and measurement equipments, consumer electronics, industrial control, instrumentation, audio, video.

cosmo devices shall not be used in equipment that requires higher level of reliability and safety, such as nuclear power control equipment, telecommunication equipment(trunk lines), space application, medical and other life supporting equipments, and equipment for aircraft, military, automotive or any other application that can cause human injury or death.

cosmo reserves the right to change the specifications, data, characteristics, structure, materials and other contents at any time without notice. Please contact cosmo to obtain the latest specification.

cosmo disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.