


6PIN RANDOM-PHASE TRIAC DRIVER PHOTOCOUPLER

Description

The KMOC3021-P \ KMOC3022-P \

KMOC3023-P series are optically isolated TRIAC driver devices. These series contain a GaAs infrared emitting diode and a light activated silicon bilateral switch, which functions like a TRIAC. They are designed for interfacing between electronic controls and power TRIACs to control resistive and inductive loads for 115 VAC operations.

Schematic



- 1. Anode
- 2. Cathode
- 3. NC
- 4. Main terminal
- 6. Main terminal

Features

- 1. Pb free and RoHS compliant
- 2. 400V peak blocking voltage
- 3. Simplifies logic control of 115 VAC power
- 4. Non zero voltage crossing
- 5. Isolation voltage between input and output (Viso: 5300Vms)
- 6. MSL class 1
- 7. Agency Approvals:
 - UL Approved (No. E169586): UL1577
 - c-UL Approved (No. E169586)
 - VDE Approved (No. 101347): DIN EN60747-5-5
 - FIMKO Approved: EN62368-1, EN60601-1
 - CQC Approved: GB4943.1-2022

Applications

- Solenoid/Valve controls
- Lighting controls
- Static power switches
- AC motor drives
- Temperature controls
- E.M contactors
- AC motor contactors
- · Solid state relay
- Programmable controllers




6PIN RANDOM-PHASE TRIAC DRIVER PHOTOCOUPLER


• Outside Dimension

Unit: mm

1.Dual-in-line type.




2.Surface mount type.




3.Long creepage distance type

1.20



4.Long creepage distance for surface mount type.



TOLERANCE: ±0.2mm

Device Marking



Notes:

cosmo

3021 \ 3022 \ 3023

YWW Y: Year code / W: Week code



6PIN RANDOM-PHASE TRIAC DRIVER PHOTOCOUPLER

Absolute Maximum Ratings

(Ta=25°℃)


Parameter		Symbol	Rating	Unit
Input	Forward current	I _F	50	mA
	Peak forward current	I _{FP}	1	Α
	Reverse v⊟tage	V _R	6	V
	Power dissipation	P _D	70	mW
Output	Off-state output terminal voltage	V_{DRM}	400	V _{PEAK}
	On-state R.M.S. current	I _{T(RMS)}	100	mA
	Peak repetitive surge current (PW=10ms.DC 10%)	I _{TSM}	1	Α
	Power dissipation	P _D	300	mW
Total power dissipation		P _{tot}	330	mW
	Isolation voltage 1 minute	V _{iso}	5300	Vrms
	Operating temperature	T _{opr}	-40 to +115	$^{\circ}\!\mathbb{C}$
	Storage temperature	T _{stg}	-50 to +125	$^{\circ}\!\mathbb{C}$
Soldering temperature 10 seconds		T _{sol}	260	$^{\circ}\!\mathbb{C}$

• Electro-optical Characteristics

(Ta=25°ℂ)

Parameter		Symbol	Conditions		Min.	Тур.	Max.	Unit
Input	Forward voltage	V_{F}	I _F =10mA		-	1.2	1.4	V
	Reverse current	I_R	V _R =4V		-	•	10	μΑ
Output	Peak blocking current	I _{DRM}	V _{DRM} Rated		-	ı	100	nA
	On-state voltage	V_{TM}	I _{TM} =100mA		-	1.6	3	V
Transfer characteristics	Holding current	I _H			-	0.1	-	mA
	Critical rate of rise of off-state voltage	dv/dt	$V_{DRM}=(1/\sqrt{2})*Rated$		1000	-	-	V/µs
	Isolation resistance	R _{iso}	DC500V		5x10 ¹⁰	10 ¹¹	-	Ω
	Minimum trigger current	I _{FT}	Main terminal voltage=3V	KMOC3021	-	-	15	mA
				KMOC3022	-	-	10	mΑ
				KMOC3023	-	1	5	mA
	Turn-on time	T _{ON}	$V_D=6V,R_L=100\Omega,I_F=20mA$		-	-	100	μs

Static dv/dt Test Circuit

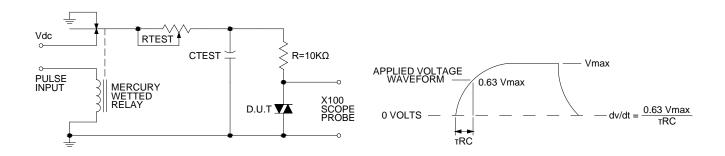



6PIN RANDOM-PHASE TRIAC DRIVER PHOTOCOUPLER

Fig.1 Forward Current vs. Ambient Temperature





Fig.2 Diode Power Dissipation vs. Ambient Temperature



Ambient Temperature Ta (°C)

Fig.3 On-state R.M.S. Current vs. Ambient Temperature





Fig.4 Total Power Dissipation vs. Ambient Temperature



Ambient Temperature Ta (°C)

Fig.5 Peak Forward Current vs. Duty Ratio





Fig.6 Forward Current vs. Forward Voltage



Forward Current I_F (mA)



6PIN RANDOM-PHASE TRIAC DRIVER PHOTOCOUPLER

Fig.7 On-state Characteristics




Fig.9 Trigger Current vs. Ambient Temperature

IFT, Normalized





Fig.8 Leakage with LED off vs. Ambient Temperature





6PIN RANDOM-PHASE TRIAC DRIVER PHOTOCOUPLER

Recommended Soldering Conditions

(a) Infrared reflow soldering:

■ Peak reflow soldering : 260°C or below (package surface temperature)

■ Time of peak reflow temperature : 10 sec
■ Time of temperature higher than 230°C : 30-60 sec
■ Time to preheat temperature from 180~190°C : 60-120 sec


■ Time(s) of reflow: Two

■ Flux : Rosin flux containing small amount of chlorine (The

flux with a maximum chlorine content of 0.2 Wt% is

recommended.)

Recommended Temperature Profile of Infrared Reflow

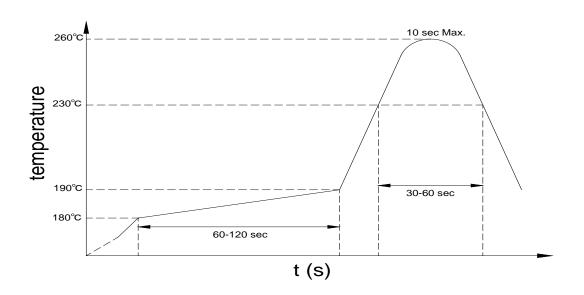

(b) Wave soldering:

■ Temperature : 260°C or below (molten solder temperature)

■ Time : 10 seconds or less

■ Preheating conditions : 120°C or below (package surface temperature)

■ Time(s) of reflow : One

■ Flux: Rosin flux containing small amount of chlorine (The flux with a maximum

chlorine content of 0.2 Wt% is recommended.)

(c) Cautions:

■ Fluxes: Avoid removing the residual flux with freon-based and chlorine-based

cleaning solvent.

Avoid shorting between portion of frame and leads.



6PIN RANDOM-PHASE TRIAC DRIVER PHOTOCOUPLER

Numbering System

KMOC3021 X (Y)-P

KMOC3022 X (Y)-P

KMOC3023 X (Y)-P

Notes:

KMOC3021 / KMOC3022 / KMOC3023 = Part No.

 $X = Lead form option (blank \cdot S \cdot H \cdot L)$

Y = Tape and reel option ($TL \cdot TR$)


P=6 PIN

Option	Description	Packing quantity	
S (TL)	surface mount type package + TL tape & reel option	1000 units per reel	
S (TR)	surface mount type package + TR tape & reel option	1000 units per reel	

Recommended Pad Layout for Surface Mount Lead Form


1. Surface mount type.


2.Long creepage distance for surface mount type.




6PIN RANDOM-PHASE TRIAC DRIVER PHOTOCOUPLER

SMD Carrier Tape & Reel

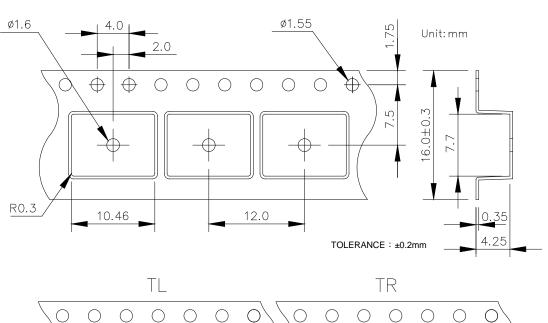

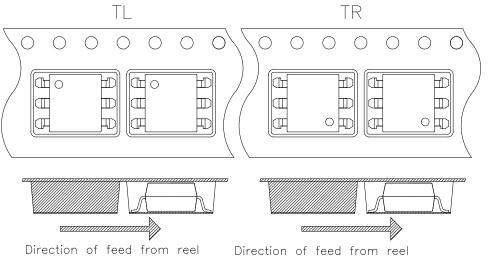

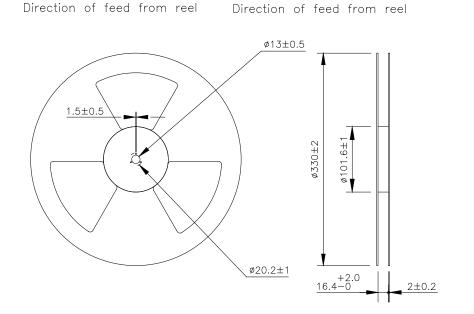

cosmo

KMOC302X-P Series

6PIN RANDOM-PHASE TRIAC DRIVER PHOTOCOUPLER

Application Notice

The statements regarding the suitability of products for certain types of applications are based on cosmo's knowledge of general applications of cosmo products. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to verify the specifications are suitable for use in a particular application. Customers are solely responsible for all aspects of their own product design or applications. The parameters provided in the datasheet may vary in different applications and performance may vary over time. All operating parameters (including typical parameters) must be validated by customer's technical experts for different applications. cosmo assumes no liability for customer' product design or applications. Product specifications do not expand or otherwise change cosmo's terms and conditions of purchase, including but not limited to the warranty expressed therein.

When using cosmo products, please comply with safety standards and instructions. cosmo has no liability and responsibility to the damage caused by improper use of the instructions specified in the specifications.

cosmo products are designed for use in general electronic equipment such as telecommunications, office automation equipments, personal computers, test and measurement equipments, consumer electronics, industrial control, instrumentation, audio, video.

cosmo devices shall not be used in equipment that requires higher level of reliability and safety, such as nuclear power control equipment, telecommunication equipment(trunk lines), space application, medical and other life supporting equipments, and equipment for aircraft, military, automotive or any other application that can cause human injury or death.

cosmo reserves the right to change the specifications, data, characteristics, structure, materials and other contents at any time without notice. Please contact cosmo to obtain the latest specification.

cosmo disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.