

6PIN ZERO-CROSS TRIAC DRIVER PHOTOCOUPLER

Description

The KMOC3061-P \ KMOC3062-P \

KMOC3063-P series consist of a GaAs infrared emitting diode optically coupled to a monolithic silicon detector performing the function of a zero voltage crossing bilateral TRIAC driver. They are designed for use with a TRIAC in the interface of logic systems to equipment powered from 115/240 VAC lines, such as solid-state relays, industrial controls, motors, solenoids and consumer appliances, etc.


Features

- 1. Pb free and RoHS compliant
- 2. 600V peak blocking voltage
- 3. Simplifies logic control of 115/240 VAC power
- 4. Zero voltage crossing
- 5. Isolation voltage between input and output (Viso: 5300Vms)
- 6. MSL class 1
- 7. Agency Approvals:
 - UL Approved (No. E169586): UL1577
 - c-UL Approved (No. E169586)
 - VDE Approved (No. 101347): DIN EN60747-5-5
 - FIMKO Approved: EN62368-1, EN60601-1
 - CQC Approved: GB4943.1-2022

Applications

- Solenoid/Valve controls
- Lighting controls
- Static power switches
- AC motor drives
- Temperature controls
- E.M contactors
- AC motor starters
- Solid state relay
- Programmable controllers

Schematic



- 1. Anode
- 2. Cathode
- 3. NC
- 4. Main terminal
- 6. Main terminal




6PIN ZERO-CROSS TRIAC DRIVER PHOTOCOUPLER


Outside Dimension

Unit: mm


1.Dual-in-line type.




2.Surface mount type.



3.Long creepage distance type



4.Long creepage distance for surface mount type.



TOLERANCE: ±0.2mm

Device Marking



Notes:

cosmo

3061 \ 3062 \ 3063

YWW Y: Year code / W: Week code

cosmo

KMOC306X-P Series

6PIN ZERO-CROSS TRIAC DRIVER PHOTOCOUPLER

Absolute Maximum Ratings

(Ta=25°C)


	Parameter	Symbol	Rating	Un⊡t	
Input	Forward current	I _F	50	mA	
	Pe⊡k forward current	I _{FM}	1	А	
	Reverse voltage	V _R	6	V	
	Power dissipation	P _D	70	mW	
Output	Off-state output terminal voltage	V_{DRM}	600	V_{PEAK}	
	On-state R.M.S. current	I _{T(RMS)}	100	mA	
	Peak repetitive surge current (PW=10ms.DC 10%)	I _{TSM}	1	А	
	Power dissipation	P _D	300	mW	
Total power dissipation		P _{tot}	330	mW	
	Isolation voltage 1 minute	V _{iso}	5300	Vrms	
	Operating temperature	T _{opr}	-40 to +115	$^{\circ}$	
	Storage temperature	T _{stg}	-50 to +125	$^{\circ}\!\mathbb{C}$	
Soldering temperature 10 seconds		T _{sol}	260	$^{\circ}\!\mathbb{C}$	

Electro-optical Characteristics

(Ta=25°ℂ)

Parameter		Symbol	Con	ditions	Min.	Тур.	Max.	Unit
Input	Forward voltage	V _F	I _F =10mA		_	1.2	1.4	V
	Reverse current	I _R	V _R =4V		-	-	10	μA
Output	Peak blocking current	I _{DRM}	V _{DRM} Rated		-	-	500	nA
	On-state voltage	V_{TM}	I _{TM} =100mA		-	1.8	3	V
Transfer charac- teristics	Holding current	I _H			-	0.1	-	mΑ
	Critical rate of rise of off-state voltage	dv/dt	$V_{DRM}=(1/\sqrt{2})^*Rated$		1000	-	-	V/µs
	Inhibit voltage (MT1-MT2 voltage above which device will not trigger)	V_{INH}	I _F = Rated I _{FT}		-	10	20	V
	Leakage in inhibited state	I _{DRM2}	I_F =Rated I_{FT} , Rated V_{DRM} , Off State		-	-	500	μΑ
	Isolation resistance	R _{iso}	DC 500V		5x10 ¹⁰	10 ¹¹	-	Ω
	Minimum trigger current	I _{FT}	Main	KMOC3061	-	-	15	mΑ
			terminal voltage=3V	KMOC3062	-	-	10	mΑ
				KMOC3063	-	-	5	mΑ

Static dv/dt Test Circuit

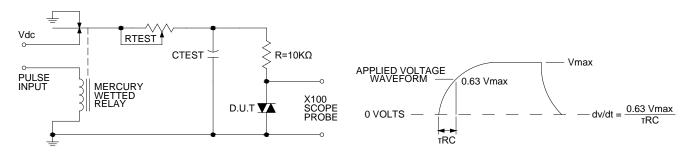



6PIN ZERO-CROSS TRIAC DRIVER PHOTOCOUPLER

Fig.1 Forward Current vs. Ambient Temperature




Fig.2 Diode Power Dissipation vs. Ambient Temperature

Diode Power Dissipation P_D (mW)




Fig.3 On-state R.M.S. Current vs. Ambient Temperature





Fig.4 Total Power Dissipation vs. Ambient Temperature



Ambient Temperature Ta (°C)

Fig.5 Peak Forward Current vs. Duty Ratio





Fig.6 Forward Current





6PIN ZERO-CROSS TRIAC DRIVER PHOTOCOUPLER

Fig.7 On-state Characteristics





Fig.9 Leakage with LED off vs. Ambient Temperature



Ambient Temperature Ta (°C)

Fig.11 Trigger Current vs. Ambient Temperature




Fig.8 Inhibit Voltage vs. Ambient Temperature





Fig.10 I_{DRM2} ,Leakage in Inhibited State vs. Ambient Temperature



Ambient Temperature Ta (°C)

cosmo

KMOC306X-P Series

6PIN ZERO-CROSS TRIAC DRIVER PHOTOCOUPLER

Recommended Soldering Conditions

(a) Infrared reflow soldering:

■ Peak reflow soldering : 260°C or below (package surface temperature)

■ Time of peak reflow temperature : 10 sec
■ Time of temperature higher than 230°C : 30-60 sec
■ Time to preheat temperature from 180~190°C : 60-120 sec


■ Time(s) of reflow: Two

■ Flux : Rosin flux containing small amount of chlorine (The

flux with a maximum chlorine content of 0.2 Wt% is

recommended.)

Recommended Temperature Profile of Infrared Reflow

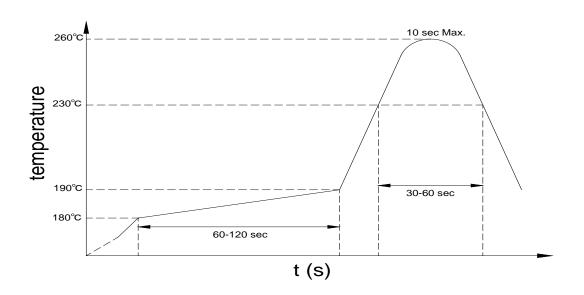

(b) Wave soldering:

■ Temperature : 260°C or below (molten solder temperature)

■ Time : 10 seconds or less

■ Preheating conditions : 120°C or below (package surface temperature)

■ Time(s) of reflow : One

■ Flux: Rosin flux containing small amount of chlorine (The flux with a maximum

chlorine content of 0.2 Wt% is recommended.)

(c) Cautions:

■ Fluxes: Avoid removing the residual flux with freon-based and chlorine-based

cleaning solvent.

Avoid shorting between portion of frame and leads.



6PIN ZERO-CROSS TRIAC DRIVER PHOTOCOUPLER

Numbering System

KMOC3061 <u>X</u> (Y)-P KMOC3062 <u>X</u> (Y)-P KMOC3063 <u>X</u> (Y)-P

Notes:

KMOC3061 / KMOC3062 / KMOC3063 = Part No.

 $X = Lead form option (blank \cdot S \cdot H \cdot L)$

Y = Tape and reel option (TL · TR · TLD · TRU)

P=6 PIN


Option	Description	Packing quantity		
S (TL)	surface mount type package + TL tape & reel option	1000 units per reel		
S (TR)	surface mount type package + TR tape & reel option	1000 units per reel		

• Recommended Pad Layout for Surface Mount Lead Form

1. Surface mount type.

6 pin SMD

+ 1.60 + 1.20 + 1.60 + 1.20 + 1.60 + 2.Long creepage distance for surface mount type.




10.70

 $\mathsf{Unit}:\mathsf{mm}$

6PIN ZERO-CROSS TRIAC DRIVER PHOTOCOUPLER

SMD Carrier Tape & Reel

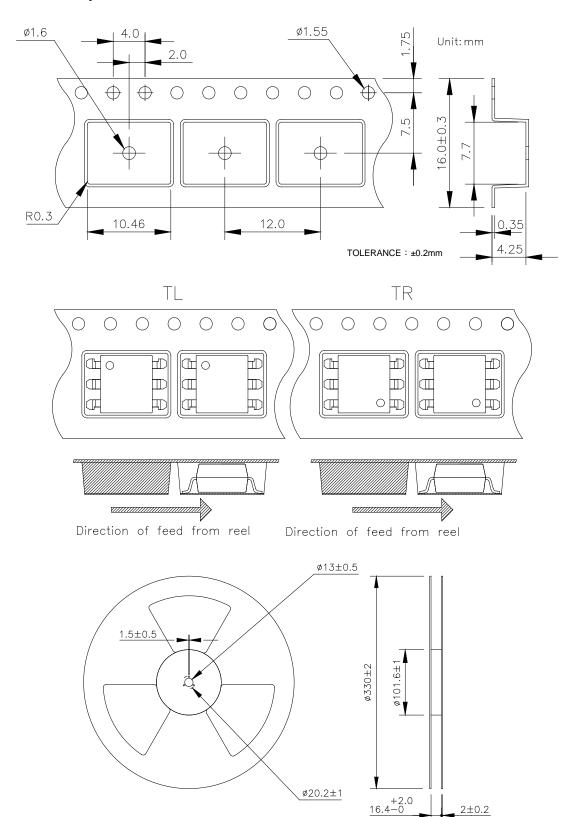

2±0.2

cosmo

KMOC306X-P Series

6PIN ZERO-CROSS TRIAC DRIVER PHOTOCOUPLER

Application Notice

The statements regarding the suitability of products for certain types of applications are based on cosmo's knowledge of general applications of cosmo products. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to verify the specifications are suitable for use in a particular application. Customers are solely responsible for all aspects of their own product design or applications. The parameters provided in the datasheet may vary in different applications and performance may vary over time. All operating parameters (including typical parameters) must be validated by customer's technical experts for different applications. cosmo assumes no liability for customer' product design or applications. Product specifications do not expand or otherwise change cosmo's terms and conditions of purchase, including but not limited to the warranty expressed therein.

When using cosmo products, please comply with safety standards and instructions. cosmo has no liability and responsibility to the damage caused by improper use of the instructions specified in the specifications.

cosmo products are designed for use in general electronic equipment such as telecommunications, office automation equipments, personal computers, test and measurement equipments, consumer electronics, industrial control, instrumentation, audio, video.

cosmo devices shall not be used in equipment that requires higher level of reliability and safety, such as nuclear power control equipment, telecommunication equipment(trunk lines), space application, medical and other life supporting equipments, and equipment for aircraft, military, automotive or any other application that can cause human injury or death.

cosmo reserves the right to change the specifications, data, characteristics, structure, materials and other contents at any time without notice. Please contact cosmo to obtain the latest specification.

cosmo disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.