

5PIN ZERO-CROSS TRIAC DRIVER PHOTOCOUPLER

#### Description

The KMOC3081 \ KMOC3082 \ KMOC3083 series consist of a GaAs infrared emitting diode optically coupled to a monolithic silicon detector performing the function of a zero voltage crossing bilateral TRIAC driver. They are designed for use with a TRIAC in the interface of logic systems to equipment powered from 240 VAC lines, such as solid-state relays, industrial controls, motors, solenoids and consumer appliances, etc.


#### Features

- 1. Pb free and RoHS compliant
- 2. 800V peak blocking voltage
- 3. Simplifies logic control of 240 VAC power
- 4. Zero voltage crossing
- 5. Isolation voltage between input and output (Viso: 5300Vms)
- 6. MSL class 1
- 7. Agency Approvals:
  - UL Approved (No. E169586): UL1577
  - c-UL Approved (No. E169586)
  - VDE Approved (No. 101347): DIN EN60747-5-5
  - FIMKO Approved: EN62368-1, EN60601-1
  - CQC Approved: GB8898-2011, GB4943.1-2011

#### Applications

- Solenoid/Valve controls
- · Lighting controls
- Static power switches
- AC motor drives
- Temperature controls
- E.M contactors
- AC motor contactors
- Solid state relay
- Programmable controllers

#### Schematic




- 1. Anode
- 2. Cathode
- 3. NC
- 4. Main terminal
- 6. Main terminal

# 5PIN ZERO-CROSS TRIAC DRIVER PHOTOCOUPLER


#### Outside Dimension

Unit: mm


1. Dual-in-line type.

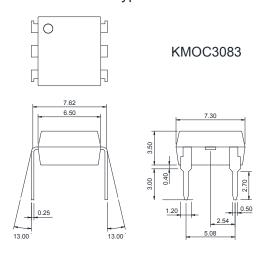


2. Surface mount type.

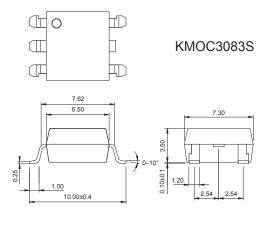

3. Long creepage distance type.

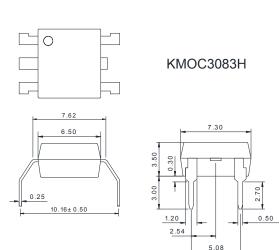

4. Long creepage distance for surface mount type.

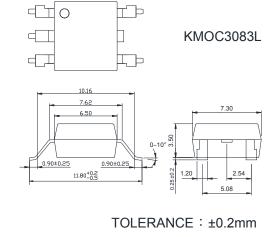

#### Device Marking



Notes:

cosmo

3081、3082、3083

YWW Y: Year code / W: Week code



5PIN ZERO-CROSS TRIAC DRIVER PHOTOCOUPLER

Absolute Maximum Ratings

(Ta=25°℃)


	Parameter	Symbol	Rating	Unit
Input	Forward current	I <sub>F</sub>	50	mA
	Peak forward current	I <sub>FM</sub>	1	Α
	Reverse voltage	$V_R$	6	V
	Power dissipation	P <sub>D</sub>	70	mW
Output	Off-state output terminal voltage	$V_{DRM}$	800	$V_{PEAK}$
	On-state R.M.S. current	I <sub>T(RMS)</sub>	100	mA
	Peak repetitive surge current (PW=10ms.DC 10%)	I <sub>TSM</sub>	1	Α
	Power dissipation	P <sub>D</sub>	300	mW
Total power dissipation		P <sub>tot</sub>	330	mW
	Isolation voltage 1 minute	V <sub>iso</sub>	5300	Vrms
	Operating temperature	T <sub>opr</sub>	-40 to +115	$^{\circ}\!\mathbb{C}$
	Storage temperature	T <sub>stg</sub>	-50 to +125	$^{\circ}\!\mathbb{C}$
	Soldering temperature 10 seconds	T <sub>sol</sub>	260	$^{\circ}\!\mathbb{C}$

Electro-optical Characteristics

(Ta=25°€)

Parameter		Symbol	Conditions		Min.	Тур.	Max.	Unit
Input	Forward voltage	V <sub>F</sub>	I <sub>F</sub> =10mA		=	1.2	1.4	V
	Reverse current	I <sub>R</sub>	V <sub>R</sub> =4V		-	-	10	μA
Output	Peak blocking current	I <sub>DRM</sub>	V <sub>DRM</sub> Rated		-	-	500	nA
	On-state voltage	$V_{TM}$	I <sub>TM</sub> =100mA		-	1.8	3	V
Transfe r charac- teristics	Holding current	I <sub>H</sub>			-	0.1	-	mA
	Critical rate of rise of off-state voltage	dv/dt	V <sub>DRM</sub> =(1/√2 )*Rated		1000	1	-	V/µs
	Inhibit voltage (MT1-MT2 voltage above which device will not trigger)	V <sub>INH</sub>	I <sub>F</sub> = Rated I <sub>FT</sub>		-	10	20	<b>V</b>
	Leakage in inhibited state	I <sub>DRM2</sub>	$I_F$ =Rated $I_{FT}$ , Rated $V_{DRM}$ , Off State		_	-	500	μA
	Isolation resistance	R <sub>iso</sub>	DC500V		5x10 <sup>10</sup>	10 <sup>11</sup>	-	Ω
	Minimum trigger current	I <sub>FT</sub>	Main terminal voltage=3V	KMOC3081	-	-	15	mA
				KMOC3082	-	-	10	mA
				KMOC3083	-	-	5	mA

#### Static dv/dt Test Circuit

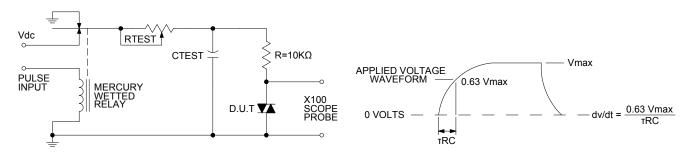



5PIN ZERO-CROSS TRIAC DRIVER PHOTOCOUPLER

Fig.1 Forward Current vs. Ambient Temperature



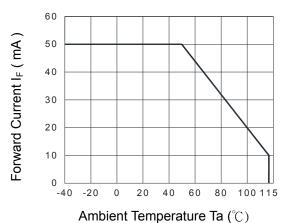


Fig.3 On-state R.M.S. Current vs. Ambient Temperature

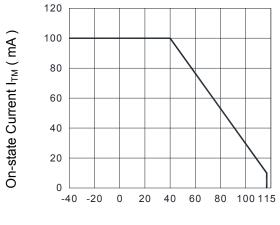


Ambient Temperature Ta (°C)

Fig.5 Peak Forward Current vs. Duty Ratio

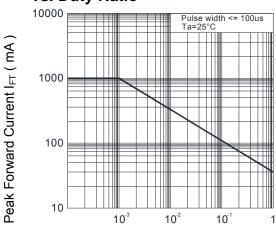


**Duty Ratio** 

Fig.2 Diode Power Dissipation vs. Ambient Temperature

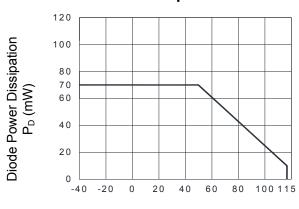


Ambient Temperature Ta (°C)

Fig.4 Total Power Dissipation vs. Ambient Temperature

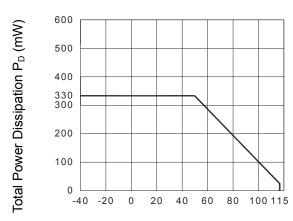

Ambient Temperature Ta (°C)

Fig.6 Forward Current vs. Forward Voltage

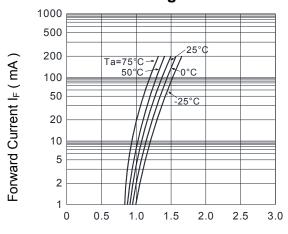

Forward Voltage (V)



5PIN ZERO-CROSS TRIAC DRIVER PHOTOCOUPLER

Fig.7 On-state Characteristics



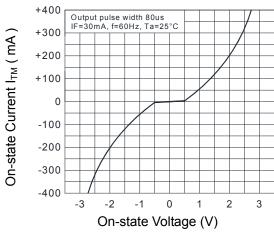


Fig.9 Leakage with LED off vs. Ambient Temperature

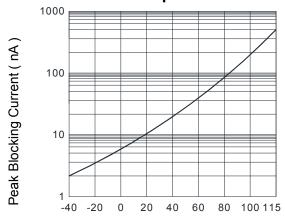

Ambient Temperature Ta (°C)

Fig.11 Trigger Current vs. Ambient Temperature

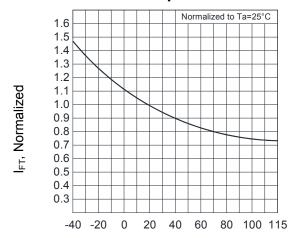

Ambient Temperature Ta (°C)

Fig.8 Inhibit Voltage vs. Ambient Temperature


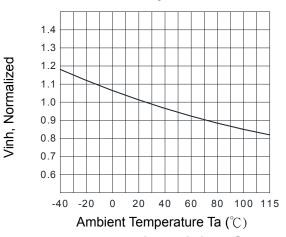


Fig.10 I<sub>DRM2</sub> ,Leakage in Inhibited State vs. Ambient Temperature

IDRM2, Normalized



Ambient Temperature Ta (°C)

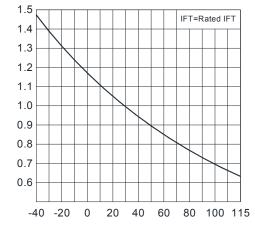

# 5PIN ZERO-CROSS TRIAC DRIVER PHOTOCOUPLER

#### Recommended Soldering Conditions

#### (a) Infrared reflow soldering:

■ Peak reflow soldering : 260°C or below (package surface temperature)

■ Time of peak reflow temperature : 10 sec
■ Time of temperature higher than 230°C : 30-60 sec
■ Time to preheat temperature from 180~190°C : 60-120 sec


■ Time(s) of reflow: Two

■ Flux : Rosin flux containing small amount of chlorine (The

flux with a maximum chlorine content of 0.2 Wt% is

recommended.)

#### **Recommended Temperature Profile of Infrared Reflow**

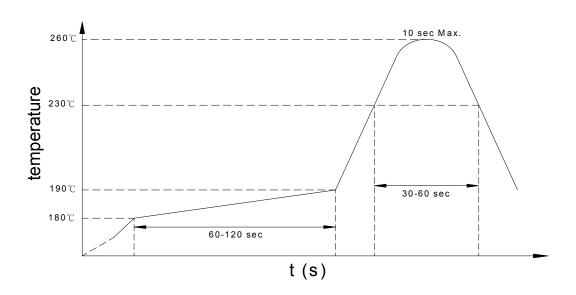

#### (b) Wave soldering:

■ Temperature : 260°C or below (molten solder temperature)

■ Time : 10 seconds or less

■ Preheating conditions : 120°C or below (package surface temperature)

■ Time(s) of reflow : One

■ Flux : Rosin flux containing small amount of chlorine (The flux with a maximum

chlorine content of 0.2 Wt% is recommended.)

(c) Cautions:

■ Fluxes : Avoid removing the residual flux with freon-based and chlorine-based

cleaning solvent.

Avoid shorting between portion of frame and leads.

5PIN ZERO-CROSS TRIAC DRIVER PHOTOCOUPLER

#### Numbering System

**KMOC3081** <u>X</u> (Y)

**KMOC3082** <u>X</u> (Y)

**KMOC3083** X (Y)

#### Notes:

KMOC3081 / KMOC3082 / KMOC3083 = Part No.


 $X = Lead form option (blank \cdot S \cdot H \cdot L)$ 

Y = Tape and reel option (TL · TR · TLD · TRU)


Option	Description	Packing quantity	
S (TL)	surface mount type package + TL tape & reel option	1000 units per reel	
S (TR)	surface mount type package + TR tape & reel option	1000 units per reel	
L (TLD)	long creepage distance for surface mount type package + TLD tape & reel option	1000 units per reel	
L (TRU)	long creepage distance for surface mount type package + TRU tape & reel option	1000 units per reel	

#### • Recommended Pad Layout for Surface Mount Lead Form

#### 1. Surface mount type.




# 2. Long creepage distance for surface mount type.




Unit: mm


5PIN ZERO-CROSS TRIAC DRIVER PHOTOCOUPLER

#### SMD Carrier Tape & Reel

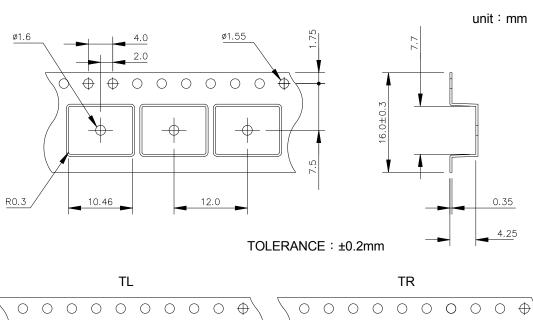


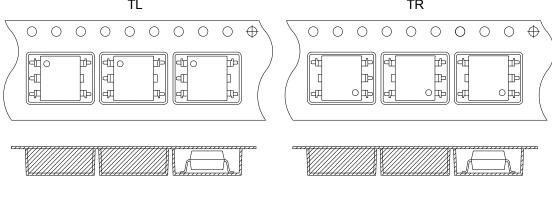

Direction of feed from reel

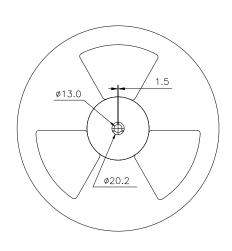


Direction of feed from reel

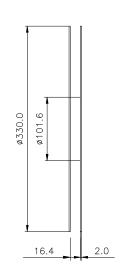


5PIN ZERO-CROSS TRIAC DRIVER PHOTOCOUPLER


#### • L Carrier Tape & Reel

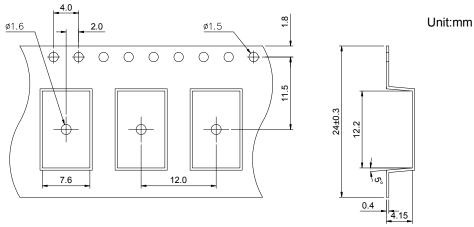


TOLERANCE: ±0.2mm

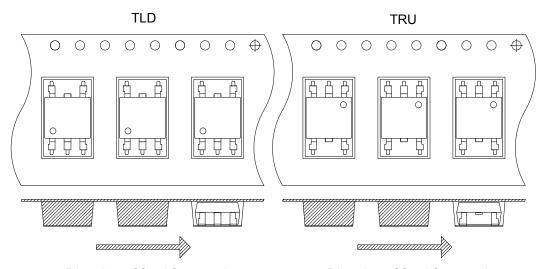

Direction of feed from reel

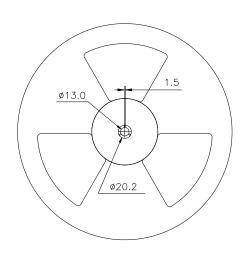

Direction of feed from reel

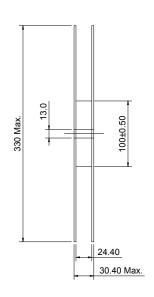

# cosmo

# KMOC308X Series

5PIN ZERO-CROSS TRIAC DRIVER PHOTOCOUPLER

#### Application Notice

The statements regarding the suitability of products for certain types of applications are based on cosmo's knowledge of general applications of cosmo products. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to verify the specifications are suitable for use in a particular application. Customers are solely responsible for all aspects of their own product design or applications. The parameters provided in the datasheet may vary in different applications and performance may vary over time. All operating parameters (including typical parameters) must be validated by customer's technical experts for different applications. cosmo assumes no liability for customer' product design or applications. Product specifications do not expand or otherwise change cosmo's terms and conditions of purchase, including but not limited to the warranty expressed therein.

When using cosmo products, please comply with safety standards and instructions. cosmo has no liability and responsibility to the damage caused by improper use of the instructions specified in the specifications.

cosmo products are designed for use in general electronic equipment such as telecommunications, office automation equipments, personal computers, test and measurement equipments, consumer electronics, industrial control, instrumentation, audio, video.

cosmo devices shall not be used in equipment that requires higher level of reliability and safety, such as nuclear power control equipment, telecommunication equipment(trunk lines), space application, medical and other life supporting equipments, and equipment for aircraft, military, automotive or any other application that can cause human injury or death.

cosmo reserves the right to change the specifications, data, characteristics, structure, materials and other contents at any time without notice. Please contact cosmo to obtain the latest specification.

cosmo disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.