


KTLP3617 (3507) Series

8PIN ZERO-CROSS TRIAC DRIVER PHOTOCOUPLER

Description

The KTLP3617 series consist of a GaAs infrared emitting diode optically coupled to a monolithic silicon detector performing the function of a zero voltage crossing bilateral TRIAC and a main output power TRIAC. They are designed for use with a TRIAC in the interface of logic systems to equipment powered from 115/240 VAC lines, such as solid-state relays, industrial controls, motors, solenoids and consumer appliances, etc.

Schematic



1.Cathode

5. Gate

2.Anode

6. T1

3.Cathode

8. T2

4. Cathode

Features

- 1. Pb free and RoHS compliant
- 2. 600V peak blocking voltage
- 3. On-state R.M.S Current 1.2A
- 4. Simplifies logic control of 115/240 VAC power
- 5. Zero voltage crossing
- 6. Isolation voltage between input and output (Viso: 5300Vms)
- 7. MSL class 1
- 8. Agency Approvals:
 - UL Approved (No. E169586): UL1577
 - c-UL Approved (No. E169586)
 - VDE Approved (No. 40020973): DIN EN60747-5-5

Applications


- TRIAC driver
- Programmable controllers
- AC-output module
- · Solid state relay
- Isolated interface between high voltage AC devices and lower voltage DC control circuitry
- Switching motors, fans, heaters, solenoids and valves
- Phase or power control in applications, such as lighting and temperature control equipment

PHOTOCOUPLER


Outside Dimension


Unit: mm

1. Dual-in-line type.




KTLP3617







2. Surface mount type.




KTLP3617S

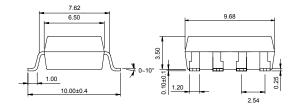


3. Long creepage distance type.




KTLP3617H






4. Long creepage distance for surface mount type.

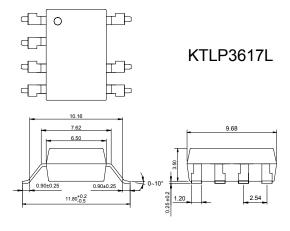

TOLERANCE: ±0.2mm

Device Marking



Notes:

cosmo

XXXX XXXX: 3617 or 3507

YWW Y: Year code / W: Week code



PHOTOCOUPLER

Absolute Maximum Ratings

(Ta=25°ℂ)

Parameter		Symbol	Rating	Unit	
Input	Forward current	I _F	50	mA	
	Peak forward current	I _{FM}	1	А	
	Reverse voltage	V_R	6	V	
	Power dissipation	P _D	70	mW	
	Off-state output terminal voltage	V_{DRM}	600	V_{PEAK}	
Output	On-state R.M.S. current	I _{T(RMS)}	1.2	А	
	Peak repetitive surge current (60Hz , Peak)	I _{TSM}	10	Α	
Isolation voltage 1 minute		V _{iso}	5300	Vrms	
Operating temperature		T_{opr}	-40 to +115	$^{\circ}\!\mathbb{C}$	
Storage temperature		T _{stg}	-50 to +125	$^{\circ}\!\mathbb{C}$	
Soldering temperature 10 seconds		T _{sol}	260	$^{\circ}\!\mathbb{C}$	

Electro-optical Characteristics

(Ta=25°ℂ)


	Parameter	Symbol	Conditions	Min.	Тур.	Max.	Unit
Input	Forward voltage	V_{F}	I _F =10mA	-	1.2	1.4	V
	Reverse current	I_R	V _R =4V	-	•	10	μΑ
Output	Peak blocking current	I_{DRM}	V _{DRM} Rated	-	ı	100	μΑ
	On-state voltage	V_{TM}	I _{TM} =1.2A	-	ı	3	V
Transfer charac- teristics	Holding current	I _H		-	ı	25	mA
	Critical rate of rise of off-state voltage	dv/dt	V_{DRM} =(1/ $\sqrt{2}$)*Rated	200	-	-	V/µs
	Inhibit voltage (MT1-MT2 voltage above which device will not trigger)	V _{INH}	I _F = Rated I _{FT}	-	1	50	V
	Leakage in inhibited state	I _{DRM2}	I_F =Rated I_{FT} , Rated V_{DRM} , Off-state	-	200	-	μΑ
	Isolation resistance	R _{iso}	DC500V	5x10 ¹⁰	-	-	Ω
	Minimum trigger current	I _{FT}	Main terminal voltage=3V	-	-	10	mA



KTLP3617 (3507) Series


8PIN ZERO-CROSS TRIAC DRIVER PHOTOCOUPLER

Fig.1 Forward Current vs. Ambient Temperature

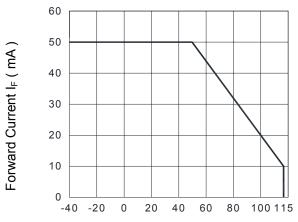

Ambient Temperature Ta (°C)

Fig.3 Peak Forward Current vs. Duty Ratio

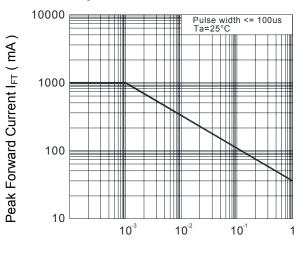

Duty Ratio

Fig.5 Trigger Current vs. Ambient Temperature



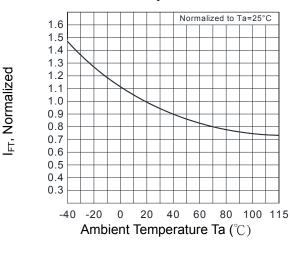


Fig.2 On-state R.M.S. Current vs. Ambient Temperature

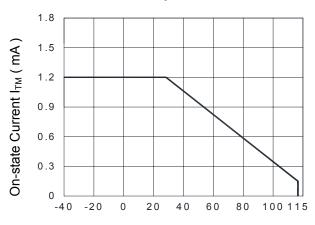


Ambient Temperature Ta (°C)

Fig.4 Forward Current vs. Forward Voltage

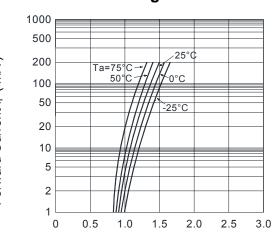

Forward Voltage (V)

Fig.6 Inhibit Voltage vs. Ambient Temperature

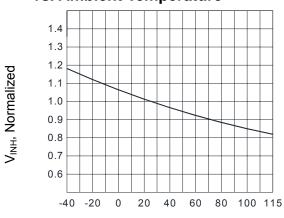

Ambient Temperature Ta (°C)



PHOTOCOUPLER

On-state Characteristics Fig.7


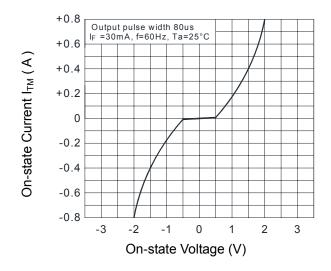


Fig.8 Leakage with LED off vs. Ambient Temperature



Ambient Temperature Ta (°C)

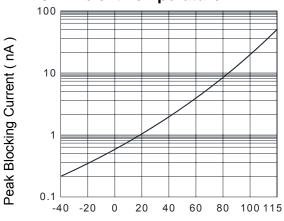

KTLP3617 (3507) Series

8PIN ZERO-CROSS TRIAC DRIVER PHOTOCOUPLER

Recommended Soldering Conditions

(a) Infrared reflow soldering:

■ Peak reflow soldering : 260°C or below (package surface temperature)

■ Time of peak reflow temperature : 10 sec
■ Time of temperature higher than 230°C : 30-60 sec
■ Time to preheat temperature from 180~190°C : 60-120 sec


■ Time(s) of reflow: Two

■ Flux : Rosin flux containing small amount of chlorine (The

flux with a maximum chlorine content of 0.2 Wt% is

recommended.)

Recommended Temperature Profile of Infrared Reflow

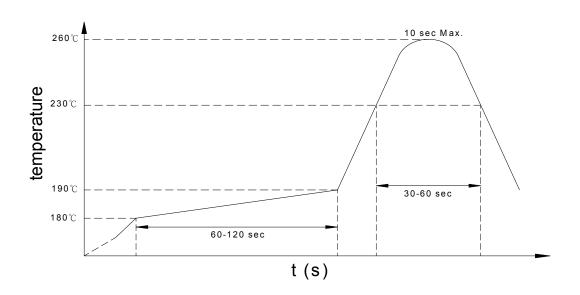

(b) Wave soldering:

■ Temperature : 260°C or below (molten solder temperature)

■ Time : 10 seconds or less

■ Preheating conditions : 120°C or below (package surface temperature)

■ Time(s) of reflow : One

■ Flux : Rosin flux containing small amount of chlorine (The flux with a maximum

chlorine content of 0.2 Wt% is recommended.)

(c) Cautions:

■ Fluxes : Avoid removing the residual flux with freon-based and chlorine-based

cleaning solvent.

Avoid shorting between portion of frame and leads.

PHOTOCOUPLER

Numbering System

KTLP3617 X (Y)

Notes:

KTLP3617 = Part No.

 $X = Lead form option (blank \cdot S \cdot H \cdot L)$

Y = Tape and reel option (TL \ TR \ TLD \ TRU)


Option	Description	Packing quantity		
S (TL)	surface mount type package + TL tape & reel option	1000 units per reel		
S (TR)	surface mount type package + TR tape & reel option	1000 units per reel		
L (TLD)	long creepage distance for surface mount type package + TLD tape & reel option	800 units per reel		
L (TRU)	long creepage distance for surface mount type package + TRU tape & reel option	800 units per reel		

Recommended Pad Layout for Surface Mount Lead Form

1. Surface mount type.

8-pin SMD 8.3


2. Long creepage distance for surface mount type.

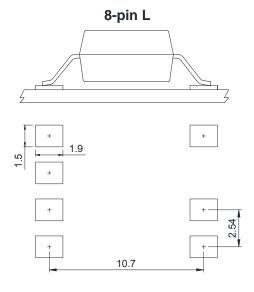



Unit: mm

PHOTOCOUPLER

SMD Carrier Tape & Reel

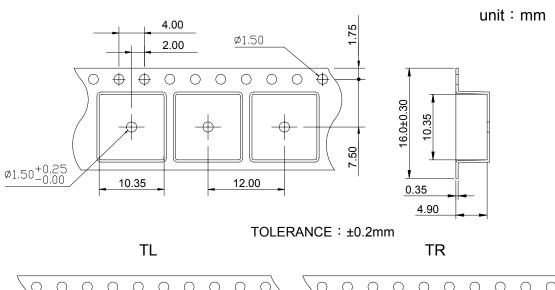


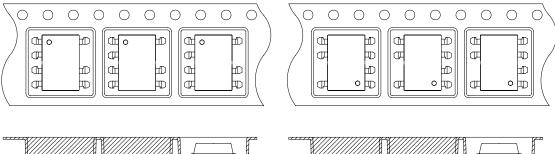




Direction of feed from reel


Direction of feed from reel



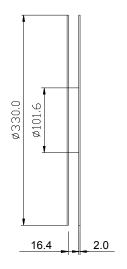


PHOTOCOUPLER


L Carrier Tape & Reel

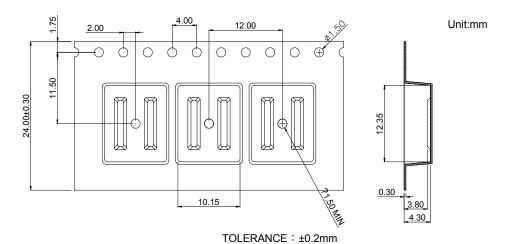

TLD **TRU**

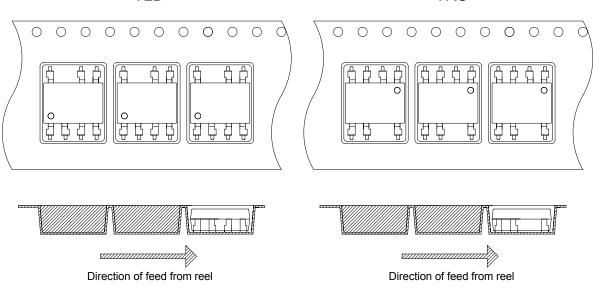

1.5 ø13.0 ø20.2

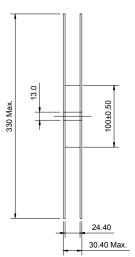

cosmo

KTLP3617 (3507) Series

8PIN ZERO-CROSS TRIAC DRIVER PHOTOCOUPLER

Application Notice

The statements regarding the suitability of products for certain types of applications are based on cosmo's knowledge of general applications of cosmo products. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to verify the specifications are suitable for use in a particular application. Customers are solely responsible for all aspects of their own product design or applications. The parameters provided in the datasheet may vary in different applications and performance may vary over time. All operating parameters (including typical parameters) must be validated by customer's technical experts for different applications. cosmo assumes no liability for customer' product design or applications. Product specifications do not expand or otherwise change cosmo's terms and conditions of purchase, including but not limited to the warranty expressed therein.

When using cosmo products, please comply with safety standards and instructions. cosmo has no liability and responsibility to the damage caused by improper use of the instructions specified in the specifications.

cosmo products are designed for use in general electronic equipment such as telecommunications, office automation equipments, personal computers, test and measurement equipments, consumer electronics, industrial control, instrumentation, audio, video.

cosmo devices shall not be used in equipment that requires higher level of reliability and safety, such as nuclear power control equipment, telecommunication equipment(trunk lines), space application, medical and other life supporting equipments, and equipment for aircraft, military, automotive or any other application that can cause human injury or death.

cosmo reserves the right to change the specifications, data, characteristics, structure, materials and other contents at any time without notice. Please contact cosmo to obtain the latest specification.

cosmo disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.