


6PIN PHOTOTRANSISTOR PHOTOCOUPLER

Description

The KP2110 series consist of an infrared emitting diode, optically coupled to a phototransistor detector. They are packaged in a 6-pin DIP package and available in wide-lead spacing and SMD option.

Schematic



- 1. Anode
- 2. Cathode
- 3. NC
- 4. Emitter
- 5. Collector
- 6. NC

Features

1. Current transfer ratio

(CTR : Min. 60% at I_F =2mA V_{CE} =5V)

2. High isolation voltage between input and output

(Viso: 5000Vrms)

- 3.Pb free and RoHS compliant.
- 4.MSL class 1
- 5. Agency Approvals:
 - UL Approved (No. E169586): UL1577
 - c-UL Approved (No. E169586)
 - VDE Approved (No. 101347): DIN EN60747-5-5

Applications


- Registers, copies, automatic vending machines
- System appliances, measuring instruments
- Computer terminals, programmable controllers
- Communications, telephone, etc
- Electric home appliances, such as oil fan heaters, microwave oven, washer, refrigerator, air conditioner, etc
- · Medical instruments, physical and chemical equipment
- Signal transmission between circuits of different potentials and impedances
- Facsimile equipment, audio, video
- · Switching power supply, laser beam printer

6PIN PHOTOTRANSISTOR PHOTOCOUPLER


Outside Dimension

Unit: mm


1.Dual-in-line type.

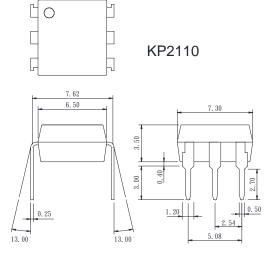


2. Surface mount type.

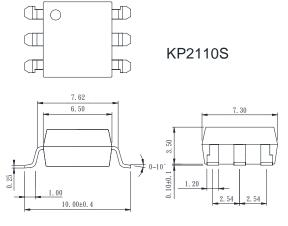

3.Long creepage distance type

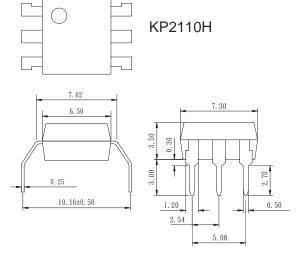


4.Long creepage distance for surface mount type.

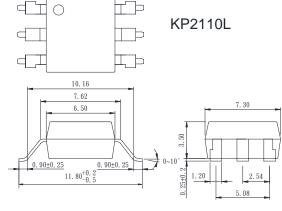

TOLERANCE: ±0.2mm

Device Marking



Notes:

COSMO
2110
YWW Y: Year code / WW: Week code



6PIN PHOTOTRANSISTOR PHOTOCOUPLER

Absolute Maximum Ratings

(Ta=25°ℂ)

	Parameter	Symbol	Rating	Unit
	Forward current	l _F	50	mA
Input	Peak forward current	I _{FM}	1	А
	Reverse voltage	V_R	6	V
	Power dissipation	P _D	70	mW
Output	Collector-emitter voltage	V _{CEO}	80	V
	Emitter-collector voltage	V _{ECO}	6	V
	Collector current	Ic	50	mA
	Collector power dissipation	P _C	150	mW
Total power dissipation		P _{tot}	200	mW
Isolation voltage 1 minute		V _{iso}	5000	Vrms
Operating temperature		T _{opr}	-55 to +115	°C
Storage temperature		T _{stg}	-55 to +125	$^{\circ}\!\mathbb{C}$
Soldering temperature 10 seconds		T _{sol}	260	$^{\circ}\!\mathbb{C}$

Electro-optical Characteristics

(Ta=25°€)

	Parameter	Symbol	Conditions	Min.	Тур.	Max.	Unit
Input	Forward voltage	V _F	I _F =20mA	-	1.2	1.4	V
	Peak forward voltage	V_{FM}	I _{FM} =0.5A	-	-	3.5	V
	Reverse current	I _R	V _R =4V	-	-	10	μ A
	Terminal capacitance	Ct	V=0, f=1KHz	-	30	-	pF
Output	Collector dark current	I _{CEO}	V_{CE} =20V, I_F =0	-	-	0.1	μ A
Transfer characteristics	Current transfer ratio	CTR	I _F =2mA, V _{CE} =5V	60	-	600	%
	Collector-emitter saturation	$V_{CE(sat)}$	I _F =20mA, I _C =1mA	-	0.1	0.3	V
	Isolation resistance	R_{iso}	DC500V	5x10 ¹⁰	10 ¹¹		Ω
	Floating capacitance	C _f	V=0, f=1MHz	-	0.6	1.0	pF
	Cut-off frequency	f _C	V_{CC} =5V, I_C =2mA, R_L =100 Ω	-	80	-	KHz
	Response time (Rise)	t _r	V_{CE} =2V, I_{C} =2mA, R_{L} =100 Ω	-	5	20	μ s
	Response time (Fall)	t _f		-	4	20	μ s

6PIN PHOTOTRANSISTOR PHOTOCOUPLER

Fig.1 Current Transfer Ratio vs. Forward Current

500 VCE =5V 450 Ta=25°C Current Transfer Ratio CTR (%) 400 350 300 250 200 150 100 50 0 0.5 1 5 10 20 50 Forward current I_F (mA)

Classification table of current transfer ratio is shown below.

KP2110 Model No.	CTR (%)
KP2110 E	60 ~ 600

Fig.2 Collector Power Dissipation vs. Ambient Temperature

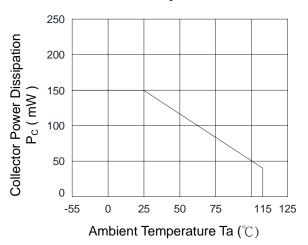


Fig.4 Forward Current vs. Ambient Temperature



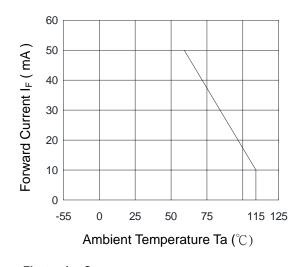


Fig.3 Collector Dark Current vs. Ambient Temperature

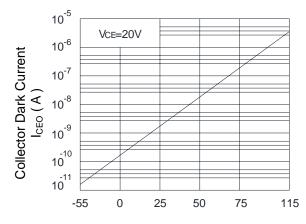

Ambient Temperature Ta (°C)

Fig.5 Forward Current vs. Forward Voltage

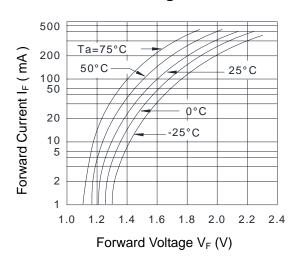

Cosmo Electronics Corp. Document No. 69P01002.3

http://www.cosmo-ic.com



6PIN PHOTOTRANSISTOR PHOTOCOUPLER

Fig.6 Collector Current vs. Collector-Emitter Voltage

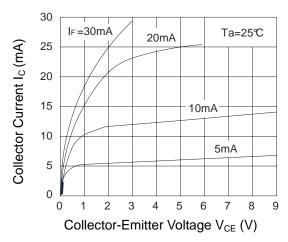


Fig.8 Collector-Emitter Saturation Voltage vs. Ambient Temperature

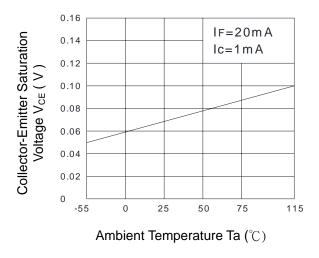


Fig.10 Response Time (Rise) vs. Load Resistance

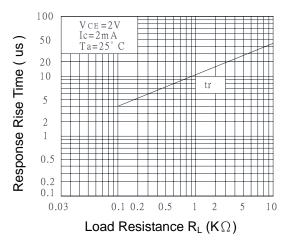


Fig.7 Relative Current Transfer Ratio vs. Ambient Temperature



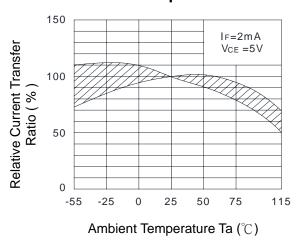


Fig.9 Collector-Emitter Saturation Voltage vs. Forward Current

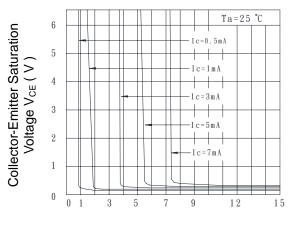

Forward Current I_F (mA)

Fig.11 Response Time (Fall) vs. Load Resistance

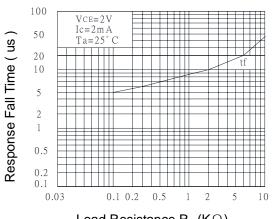


Load Resistance $R_L(K\Omega)$

Cosmo Electronics Corp. Document No. 69P01002.3 http://www.cosmo-ic.com

6PIN PHOTOTRANSISTOR PHOTOCOUPLER

Test Circuit for Response Time

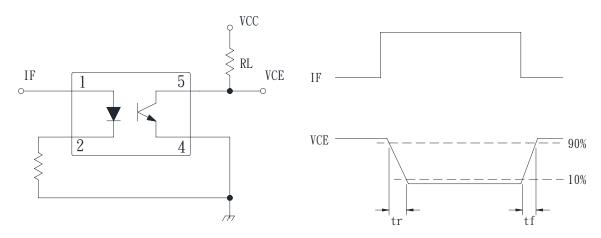



KP2110 Series 6PIN PHOTOTRANSISTOR PHOTOCOUPLER

Recommended Soldering Conditions

(a) Infrared reflow soldering:

■ Peak reflow soldering : 260°C or below (package surface temperature)

■ Time of peak reflow temperature : 10 sec
 ■ Time of temperature higher than 230°C : 30-60 sec
 ■ Time to preheat temperature from 180~190°C : 60-120 sec


■ Time(s) of reflow: Two

■ Flux: Rosin flux containing small amount of chlorine (The

flux with a maximum chlorine content of 0.2 Wt% is

recommended.)

Recommended Temperature Profile of Infrared Reflow

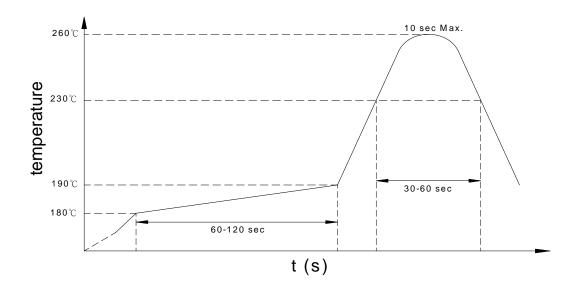

(b) Wave soldering:

■ Temperature : 260°C or below (molten solder temperature)

■ Time : 10 seconds or less

■ Preheating conditions : 120°C or below (package surface temperature)

■ Time(s) of reflow : One

■ Flux: Rosin flux containing small amount of chlorine (The flux with a maximum

chlorine content of 0.2 Wt% is recommended.)

(c) Cautions:

■ Fluxes : Avoid removing the residual flux with freon-based and chlorine-based

cleaning solvent.

Avoid shorting between portion of frame and leads.

6PIN PHOTOTRANSISTOR PHOTOCOUPLER

Numbering System

KP2110 <u>X</u> <u>Y</u> (Z)

Notes:

KP2110 = Part No.

X = Lead form option (0,S,H,L)

Y = CTR rank (E)

Z = Tape and reel option (TL,TR,TLD,TRU)


Option	Description	Packing quantity	
S (TL)	surface mount type package + TL tape & reel option	1000 units per reel	
S (TR)	surface mount type package + TR tape & reel option	1000 units per reel	
L TLD)	long creepage distance for surface mount type package + TLD tape & reel option	1000 units per reel	
L (TRU)	long creepage distance for surface mount type package + TRU tape & reel option	1000 units per reel	

• Recommended Pad Layout for Surface Mount Lead Form

1. Surface mount type.

6 pin SMD + 1.60 + 1.60 + 1.52 + 1.60 + 1.6


2.Long creepage distance for surface mount type.

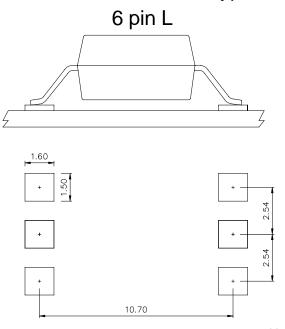



Unit: mm http://www.cosmo-ic.com


6PIN PHOTOTRANSISTOR PHOTOCOUPLER

• 6-pin SMD Carrier Tape & Reel

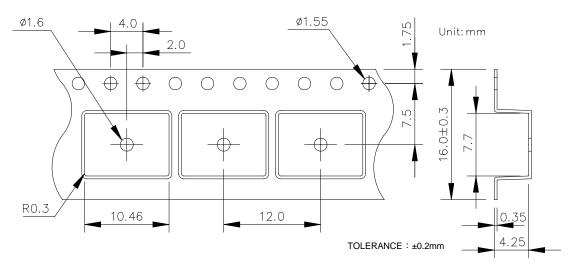

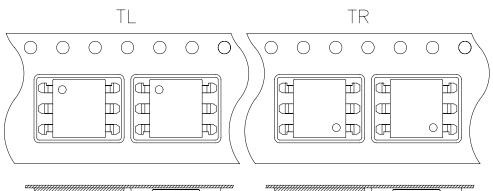




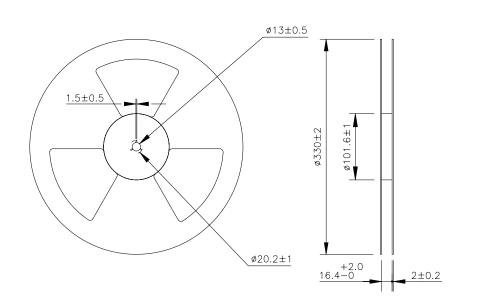



• 6-pin L Carrier Tape & Reel

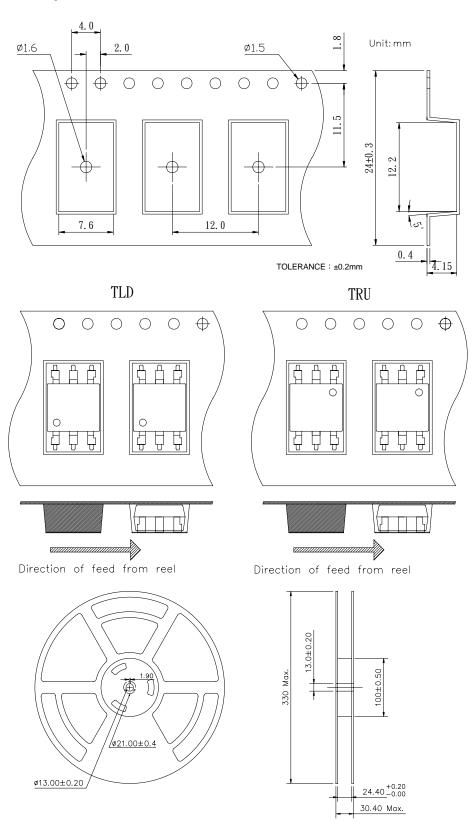



KP2110 Series 6PIN PHOTOTRANSISTOR PHOTOCOUPLER

Application Notice

The statements regarding the suitability of products for certain types of applications are based on cosmo's knowledge of general applications of cosmo products. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to verify the specifications are suitable for use in a particular application. Customers are solely responsible for all aspects of their own product design or applications. The parameters provided in the datasheet may vary in different applications and performance may vary over time. All operating parameters (including typical parameters) must be validated by customer's technical experts for different applications. cosmo assumes no liability for customer' product design or applications. Product specifications do not expand or otherwise change cosmo's terms and conditions of purchase, including but not limited to the warranty expressed therein.

When using cosmo products, please comply with safety standards and instructions. cosmo has no liability and responsibility to the damage caused by improper use of the instructions specified in the specifications.

cosmo products are designed for use in general electronic equipment such as telecommunications, office automation equipments, personal computers, test and measurement equipments, consumer electronics, industrial control, instrumentation, audio, video.

cosmo devices shall not be used in equipment that requires higher level of reliability and safety, such as nuclear power control equipment, telecommunication equipment(trunk lines), space application, medical and other life supporting equipments, and equipment for aircraft, military, automotive or any other application that can cause human injury or death.

cosmo reserves the right to change the specifications, data, characteristics, structure, materials and other contents at any time without notice. Please contact cosmo to obtain the latest specification.

cosmo disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.